


professional high power peltier element

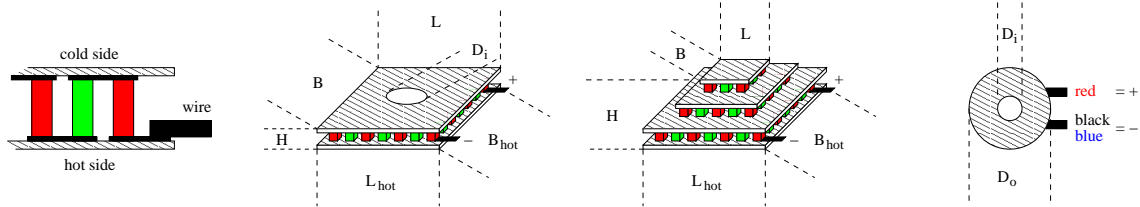


thermal and electrical data:

thermal force:

resistance:

thermal conductivity:

α_{300K}	0.0826	$\frac{V}{K}$
ρ_{300K}	0.815	Ω
γ_{300K}	3.47	$\frac{W}{K}$

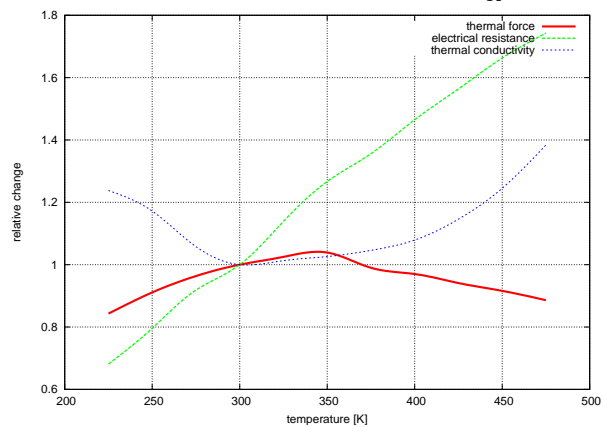

available maximum operating temperatures: T_{max}

125, 150, 200, 250 °C

tolerances:

±15%

mechanical data:

size of cold side:

$L \times B \times H$ 62.0 × 62.0 × 3.50 mm

size of hot side:

$L_{hot} \times B_{hot}$ 62.0 × 62.0 mm

height tolerance:

ΔH ±0.5 mm

length and width tolerances:

ΔL and ΔB ±1.0 mm

weight:

m 62 g

ceramic plates:

BK-100 (grey), BK-96 (white) or AlN (opaque)

location of production:

China

experimental data:

typical values at:

		$T_h = 50^\circ C:$	$T_h = 300 K:$
maximum cooling power:	Q_{max}	437.3 W	376.8 W
	at $\Delta T = 0$ and $I_{Q_{max}}$	32.8 A	30.4 A
maximum temperature difference:	ΔT_{max}	74.5 K	66.0 K
	at $Q = 0$ and $I_{\Delta T_{max}}$	25.2 A	23.7 A
	U_{max}	26.7 V	24.8 V

order information:

TEC2H-62-62-437/75-CS: sealed, max. 125°C
 TEC2H-62-62-437/75-DS: sealed, max. 150°C
 TEC2H-62-62-437/75-FS: sealed, max. 200°C
 TEC2H-62-62-437/75-HS: sealed, max. 250°C