


industrial micro peltier element

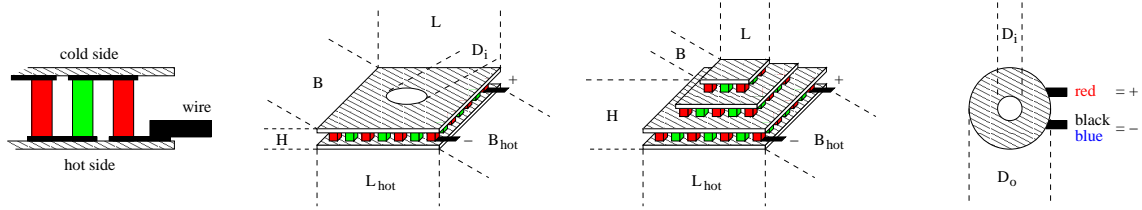

thermal and electrical data:

thermal force:


α_{300K} 0.0142 $\frac{V}{K}$

resistance:

ρ_{300K} 1.95 Ω

thermal conductivity:

γ_{300K} 0.0397 $\frac{W}{K}$

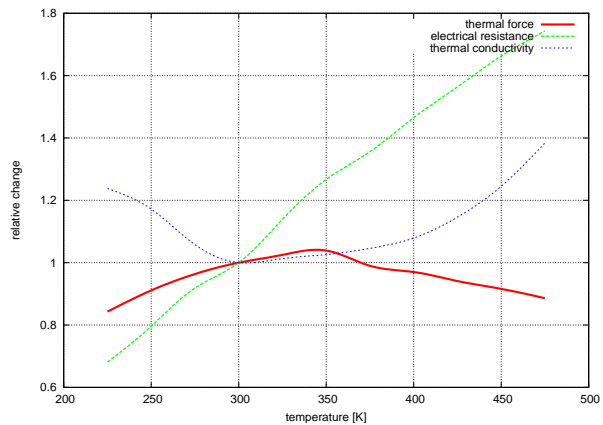

available maximum operating temperatures: T_{max} 80, 120, 150(non-ROHS!), 225 °C
typical tolerances: $\pm 5\%$

mechanical data:

size of cold side:

$L \times B \times H$ 6.0 × 12.0 × 2.80 mm

size of hot side:

$L_{hot} \times B_{hot}$ 6.0 × 12.0 mm

height tolerance:

ΔH ± 0.25 mm

length and width tolerances:

ΔL and ΔB +0.5/ - 0.2 mm

weight:

m 1 g

ceramic plates:

BK-100 (grey), BK-96 (white) or AlN (opaque)

location of production:

Russia

experimental data:

typical values at:

		$T_h = 50^\circ C:$	$T_h = 300 K:$
maximum cooling power:	Q_{max}	5.4 W	4.6 W
	at $\Delta T = 0$ and $I_{Q_{max}}$	2.3 A	2.2 A
maximum temperature difference:	ΔT_{max}	77.9 K	69.0 K
	at $Q = 0$ and $I_{\Delta T_{max}}$	1.8 A	1.7 A
	U_{max}	4.6 V	4.2 V

order information:

TEC1M-6.0-12.0-5.4/78-B: max. 80°C
TEC1M-6.0-12.0-5.4/78-C: max. 120°C
TEC1M-6.0-12.0-5.4/78-D: max. 150°C
TEC1M-6.0-12.0-5.4/78-G: max. 225°C